

Inline Deflagration Flame Arrester (Short time burning) : 1023-0019-70

EC design test certificate no.

: IBExU 14 ATEX 2025 X

Standard gap (MESG)

: $\geq 0,50$ mm

Explosion group

: Ex G IIB

Operating direction

:

Flange connection



: EN1092-1 Typ01 (DIN2576) PN10/16

Thread connection

: G2" innen/internal ISO228-1

Weight

: ~ 11,2 kg

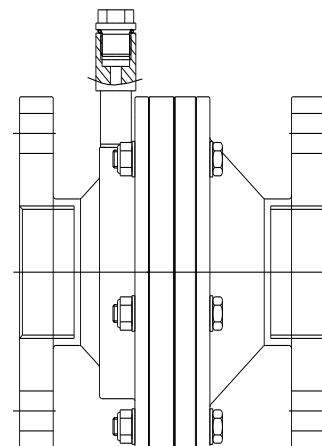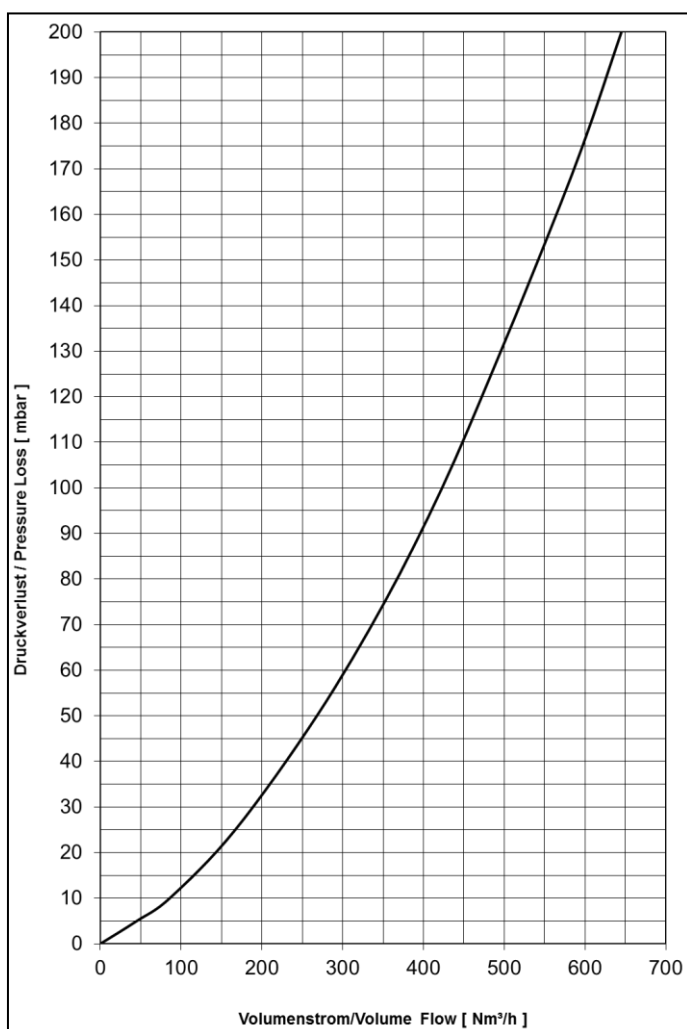

Material

Housing

V4A/AISI 316 range / AISI 316 range

Flame Arrester Element

1.4571 / AISI 316 Ti

O-Ring

PTFE

Operating Data

Type : DEF

Absolute pressure : $\leq 1,2$ bar

Temperature : $\leq 60,0$ °C

Nominal pipe size : \leq DN50

Pressure loss

Medium Air

$p_0 = 1013$ mbar, $T_0 = 273$ K, density = $1,293$ kg/m³