

Inline Detonation Flame Arrester

: 1002-0021-45

EC design test certificate no.

: IBExU 10 ATEX 2137 X

Standard gap (MESG)

: $\geq 0,65$ mm

Explosion group

: Ex G IIB3

Operating direction



: Bidirektional / Bi-directional

Thread connection

: G1 1/2" innen/internal ISO228-1

Weight

: ~ 8,1 kg

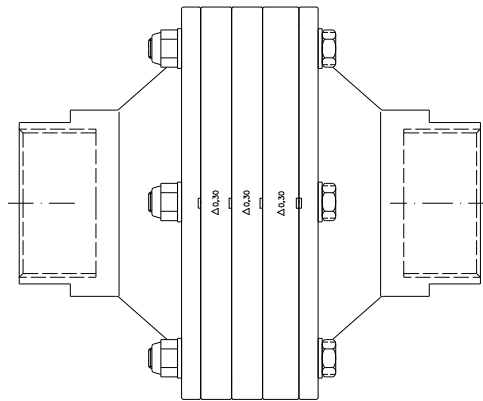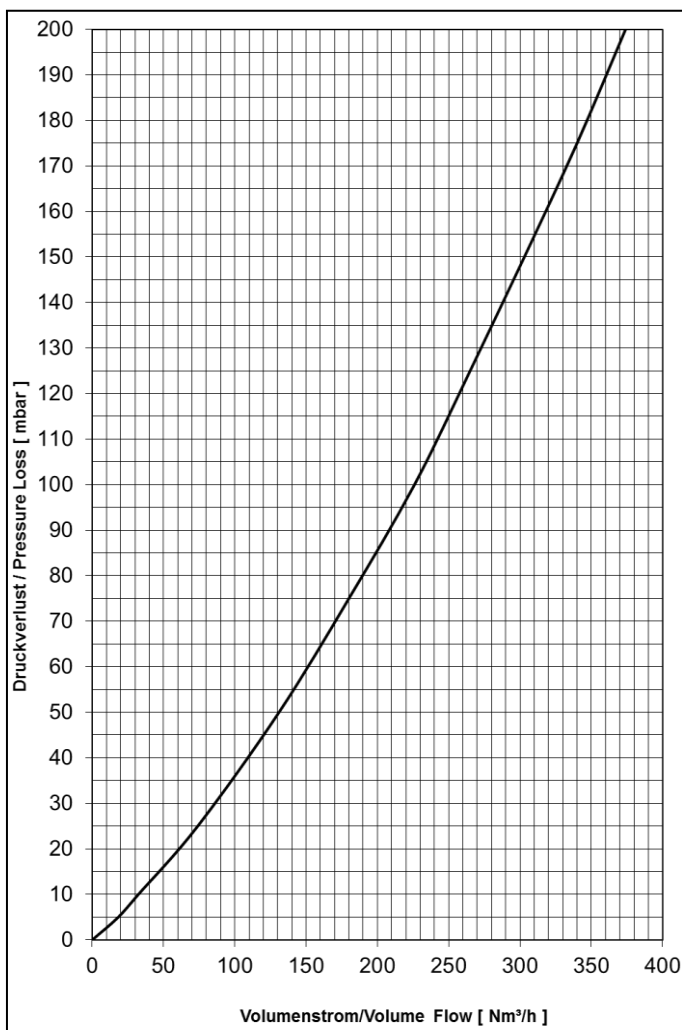

Material

Housing

V4A/AISI 316 range

Flame Arrester Element

1.4571 / AISI 316 Ti

O-Ring

PTFE

Operating Data

Type : DET 4

Absolute pressure : $\leq 1,2$ bar

Temperature : $\leq 60,0$ °C

Nominal pipe size : \leq DN40

Pressure loss

Medium Air

$p_0 = 1013$ mbar, $T_0 = 273$ K, density = 1,293 kg/m³

www.flammergmbh.com

Tel : 0049 (0) 7135 93 84 21 0

Fax : 0049 (0) 7135 93 84 21 99

