
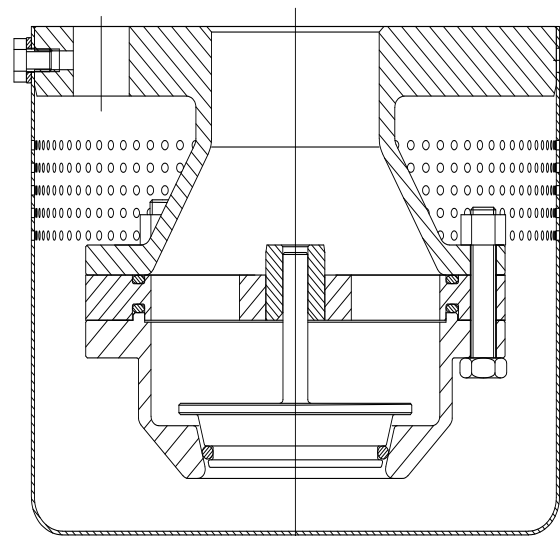


Foot valve	: 1014-0004-40
EC design test certificate no.	: IBExU 17 ATEX 2085 X
Standard gap (MESG)	: $\geq 0,65$ mm
Explosion group	: Ex G IIB3
Operating direction	: Einseitig / One direction
Flange connection	: EN1092-1 Typ 01 (DIN2576) PN10/16
Weight	: ~ 6,6 kg

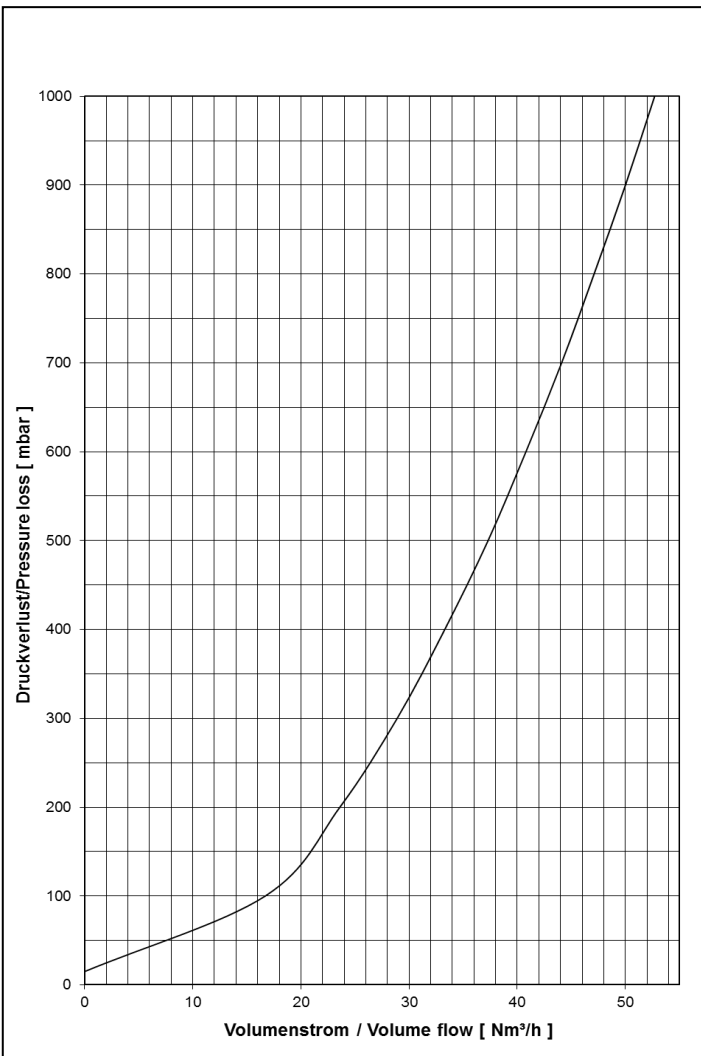

Protected Side

Material

Housing

V4A / AISI 316 range

O-Ring

PTFE

Operating Data

Type : DET 4

Absolute pressure : $\leq 1,1$ bar

Temperature : $\leq 60,0$ °C

Nominal pipe size : \leq DN40

Pressure loss

Medium Air

$p_0 = 1013$ mbar, $T_0 = 273$ K, density = $1,293$ kg/m³