
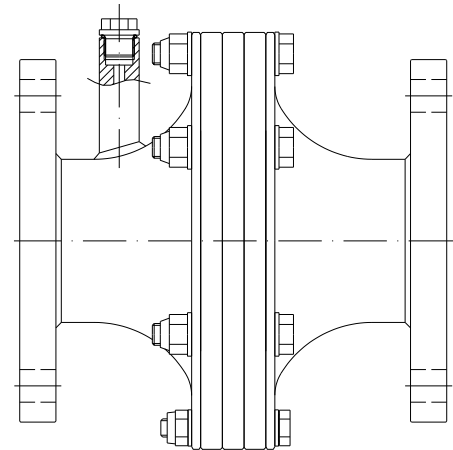


**Inline Detonation Flame Arrester (Short time burning) : 1022-0018-40**

<b>EC design test certificate no.</b>	: IBExU 08 ATEX 2066 X
<b>Standard gap (MESG)</b>	: $\geq 0,65$ mm
<b>Explosion group</b>	: $\text{Ex}$ G IIB3
<b>Operating direction</b>	:
<b>Flange connection</b>	: EN1092-1 Typ01 (DIN2576) PN10(16)
<b>Thread connection</b>	:
<b>Weight</b>	: ~ 18,2 kg

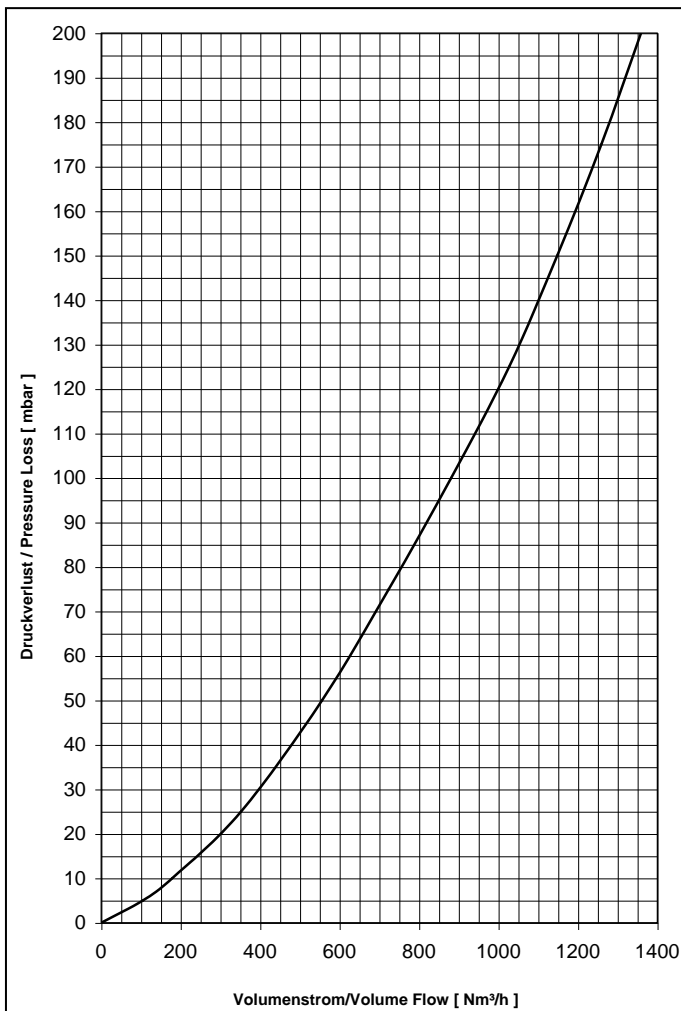

**Material**

Housing

V4A/AISI 316 range

Flame Arrester Element

1.4571 / AISI 316 Ti

O-Ring

PTFE

**Operating Data**

Type	: DET4
Absolute pressure	: $\leq 1,2$ bar
Temperature	: $\leq 60,0$ °C
Nominal pipe size	: $\leq$ DN65

**Pressure loss**

**Medium Air**

$p_0 = 1013$  mbar,  $T_0 = 273$ K, density = 1,293 kg/m<sup>3</sup>