
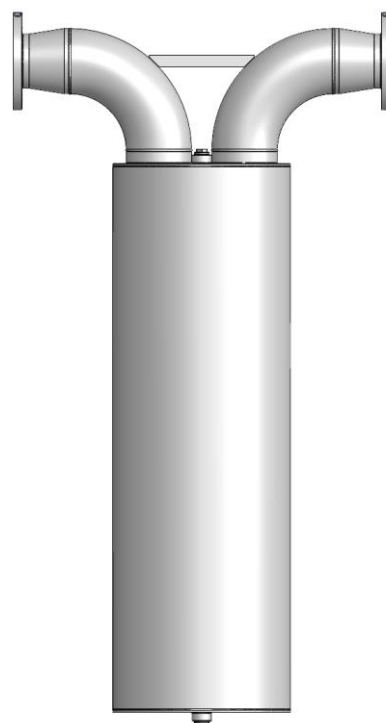


Inline Liquid Product Detonation Flame Arrester	: 1015-0001-30
EC design test certificate no.	: IBExU 21 ATEX 2108 X
Standard gap (MESG)	: $\geq 0,65$ mm
Explosion group	: Ex G IIB3
Operating direction	: Einseitig / One direction
Flange connection	: EN1092-1 Typ 11 Form B1 PN10/16
Weight	: ~ 147,5 kg

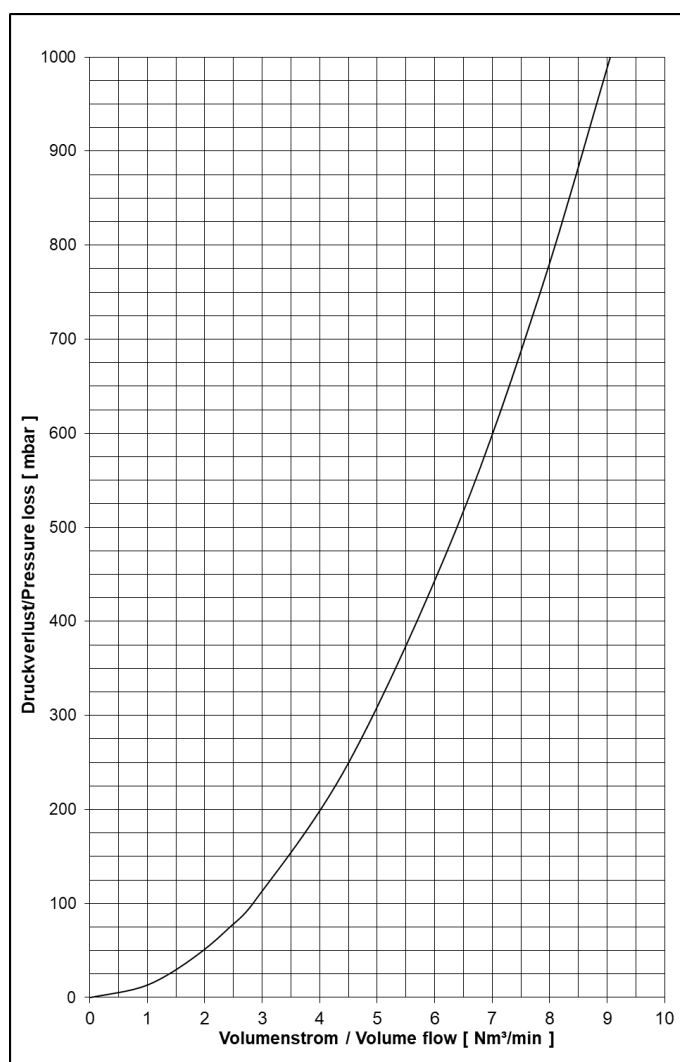

Material

Housing

Steel outside zinc plated, passivated

Operating Data

Type : DET4
Absolute pressure : $\leq 1,1$ bar
Temperature : $\leq 60,0$ °C
Nominal pipe size : \leq DN125

Pressure loss

Medium Water

t = 15 °C, density = 1000 kg/m³