

Inline Deflagration Flame Arrester

EC design test certificate no.

Standard gap (MESG)

Explosion group

Operating direction

Flange connection

Weight

Option

: 1003-0028-30

: IBExU 24 ATEX 2030 X

: < 0,50 mm



: Ex G IIC

: Bidirektional / Bi-directional

: EN1092-1 Typ01 (DIN2576) PN10(40)

: ~ 5,7 kg

:

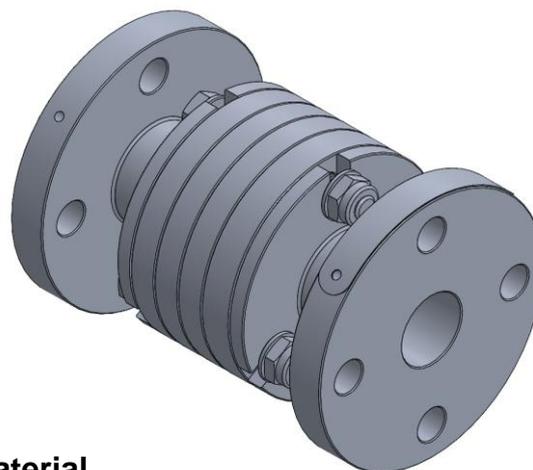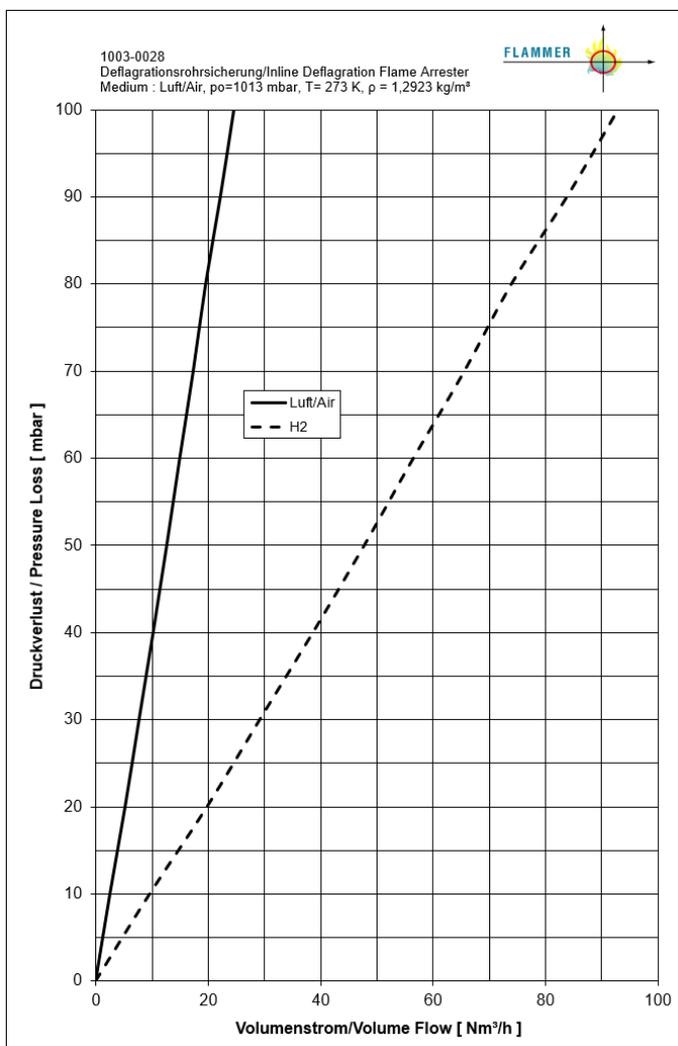

Material

Housing

Edelstahl V4A, Stainless steel 316 range

Flame Arrester Element

V4A/AISI 316 range

O-Ring

PTFE

Operating Data

Type : DEF
Absolute pressure : ≤ 1,1 bar
Temperature : ≤ 60,0 °C
Nominal pipe size : ≤ DN20